

Piezo Electric Buzzer

PZ Series


Features

- Available in Either Intermittent (INT) or Continuous (CON) Tone
- Surface Mounting, 2 Screws
- 26 AWG (UL1007) Black and Red Wire Leads



Piezo Electric Buzzer, Typical Applications Include Automobiles, Phones, Kitchen Appliances, Clinical Diagnostic Equipment, Smoke Alarms, Pet Training Devices, and Other Signaling Devices.

D97

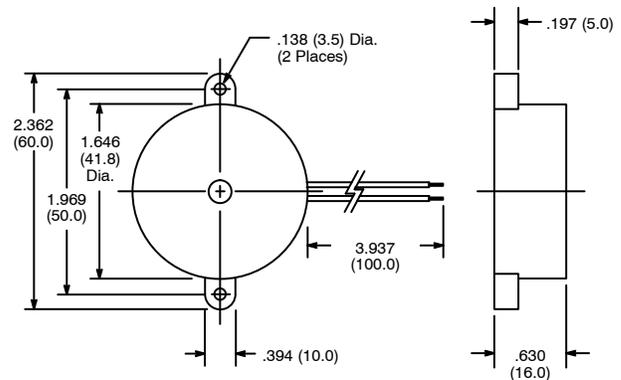

DC OPERATED

NTE Type No.	Qty	Tone/ Pulse Rate	Rated Voltage	Current Consumption	Diag No.
PZ-02-INT	1	Intermittent	12VDC	12mA Max	D97
PZ-02-INT-5	5	Intermittent	12VDC	12mA Max	D97
PZ-02-CON	1	Continuous	12VDC	12mA Max	D97
PZ-02-CON-5	5	Continuous	12VDC	12mA Max	D97

Electrical Specifications

Operate Data

Operating Voltage: 3 – 24VDC

Sound Pressure Level: 95 dBA Min. at 15 cm

Resonant Frequency: 2700Hz ±500Hz

Environmental Characteristics

Operating Ambient: -20°C to +85°C

Mechanical Data

Housing Material: ABS

Lead Wires: 26 AWG, UL1007

Weight

Std: 15 gram approx.